LIGHT

LG-05PD4D94-003B-B-T

SPEC. NO. : SZ2[illegible]1031302
DATE : 202[illegible]2/12/16
REV. : A/4

Approved By:

Checked By:

Prepared By:

Version change history

REV.	Item(Content)
A/0	New Issue
A/1	Change the photoelectric curve
A/2	Pin and PCB surface warping can be improved by changing size
A/3	Pin and PCB surface dimensions from "0±0.1" to "0.05±0.05"
A/4	In order to improve the yield without assembly of the product at the client, the size marking PCB surface was modified from "0.05±0.05" to "0± technical and quality department negotiation by the parties

Part No.	LG-05PD4D94-003B-B-T

Suggest IR Reflow Condition For Lead Free:

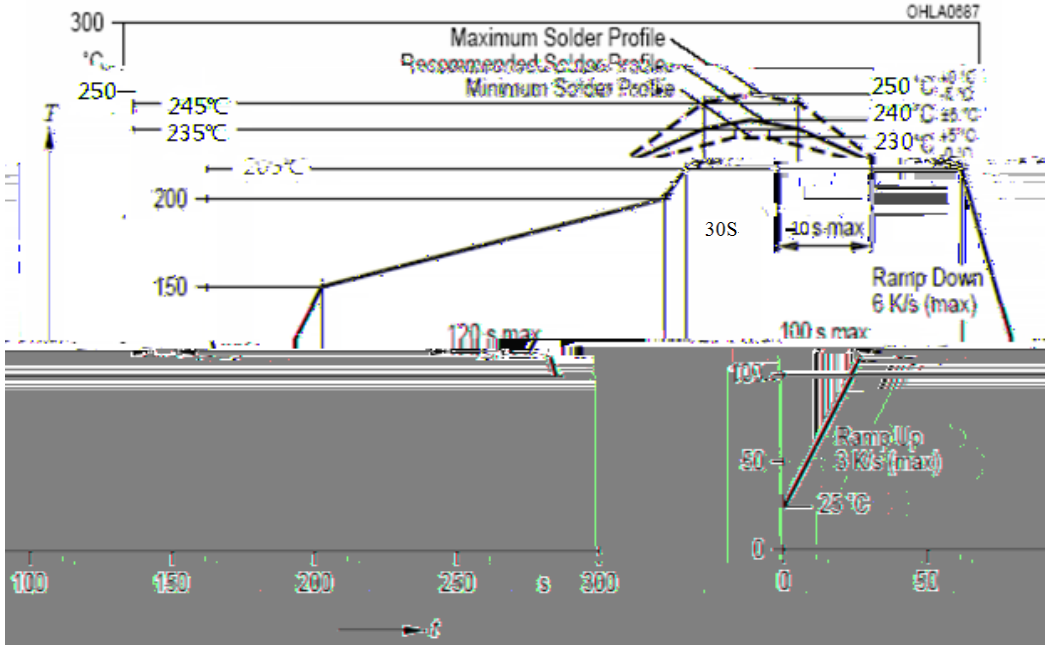

Package

Package Dimensions

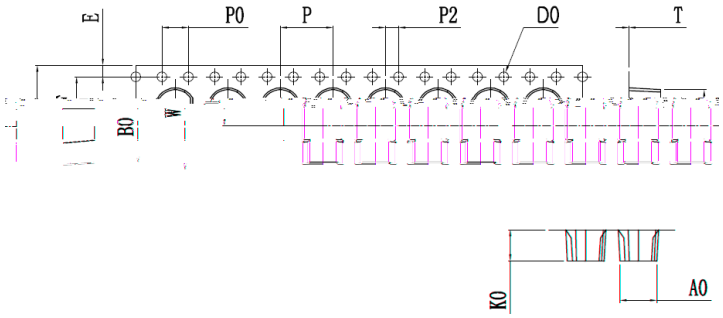

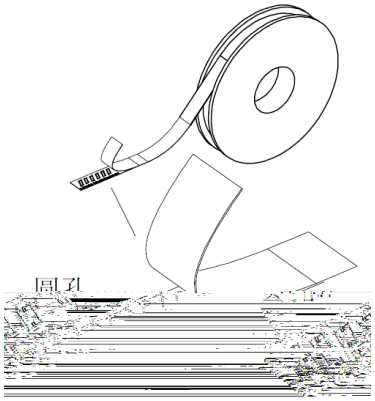

[redacted]

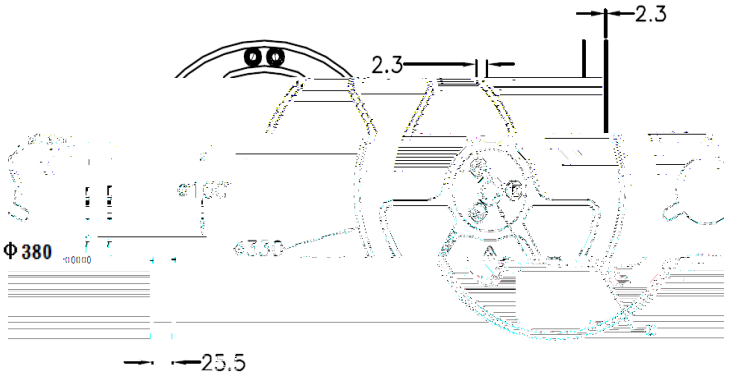

Item	Specification	
	Minmum	Maximum
W	15.97	16.3
P	7.9	8.1
E	1.65	1.85
F	7.4	7.6
D	1.5	1.6
P0	3.9	4.1
P0x10	39.8	40.2
P2	1.9	2.1
A0	5.2	5.4
B0	10.6	10.8
K0	4.8	5.0

Notes:

1.All dimensions in millimeters.
2.All dimensions meet EIA-481-C requirements.
3.Cover tape by a heat sealing manner.

Package Spec:

1. 1500pcs per reel .

15 reel per carton/Total 22500pcs per carton.

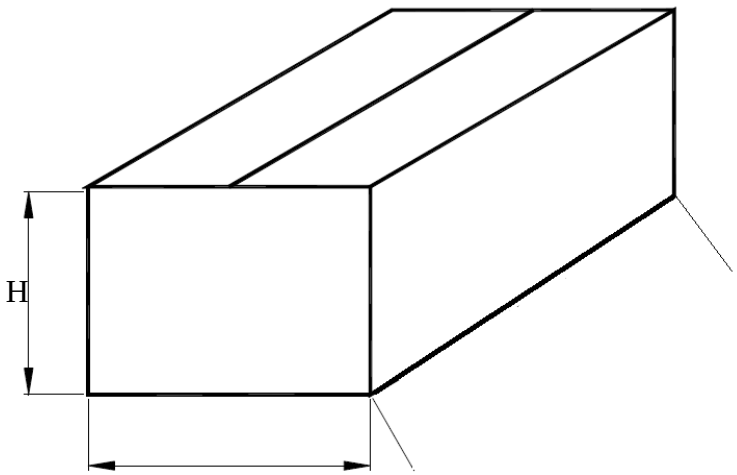

Item	Specification	
	minmum	Maximum
L	465	475
W	405	415
H	405	415