

LIGHT

LIGHT ELECTRONICS CO., LTD.

Electro-Optical Characteristics

◇ 1⑧

| 参数名称 | | 符号 | 数值 | 单位 |
|------|--|----|----|----|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

◇ 1⑧
Electro-Optical Characteristics (Temperature=25°C)

| 参数名称 | 符号 | 条件 | 颜色 | 最小值 | 典型值 | 最大值 | 单位 |
|------|----|----|----|-----|-----|-----|----|
| | | | | | | | μ |
| | | | | | | | |
| | | | | | | | |
| | λ | | | | | | |
| | | | | | | | |
| | Δλ | | | | | | |
| | | | | | | | |
| | θ | | | | | | |
| | | | | | | | |

以上 厂商

manufacturer.

LIG

LIGHT ELECTRONICS CO., LTD.


Reliability Test Items And Conditions

| 实验项目 | 参考标准 | 实验条件 | 时间 | 样品数 | 判据 |
|------|------|------|----|-----|----|
| | | ←→ | | | |

Product design and operational recommendation


1 mm

Product design Unit: mm

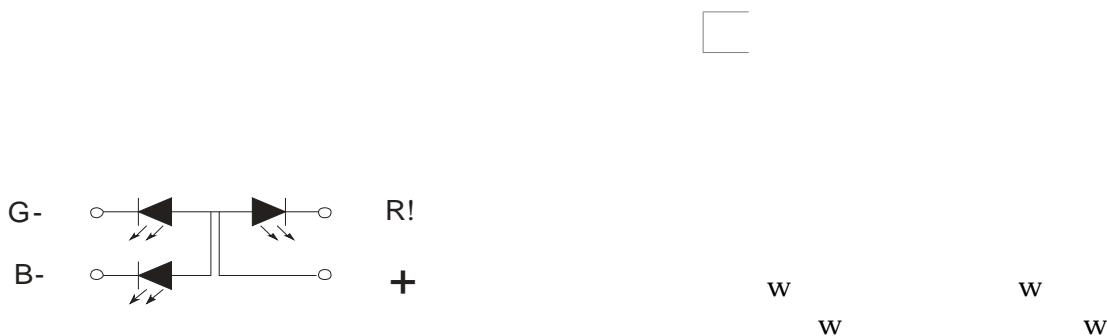


2 mm

Recommended soldering pad (Unit: mm)

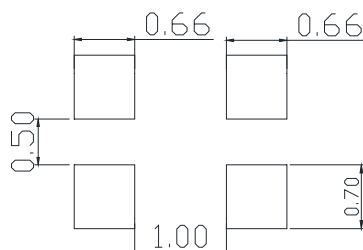

3 0.75mm

Recommendation for glue filling: filling height must be higher than or equal to 0.75mm

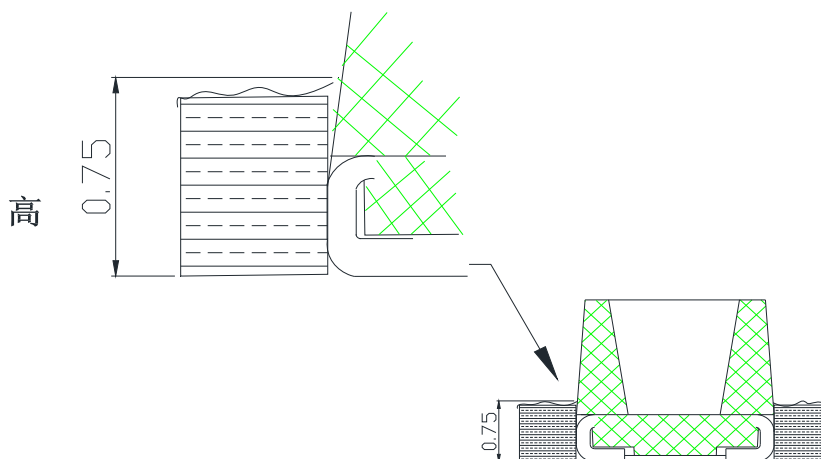

1

Packaging (1)


◇ Carrier Tape

◇


2

Packaging(2)

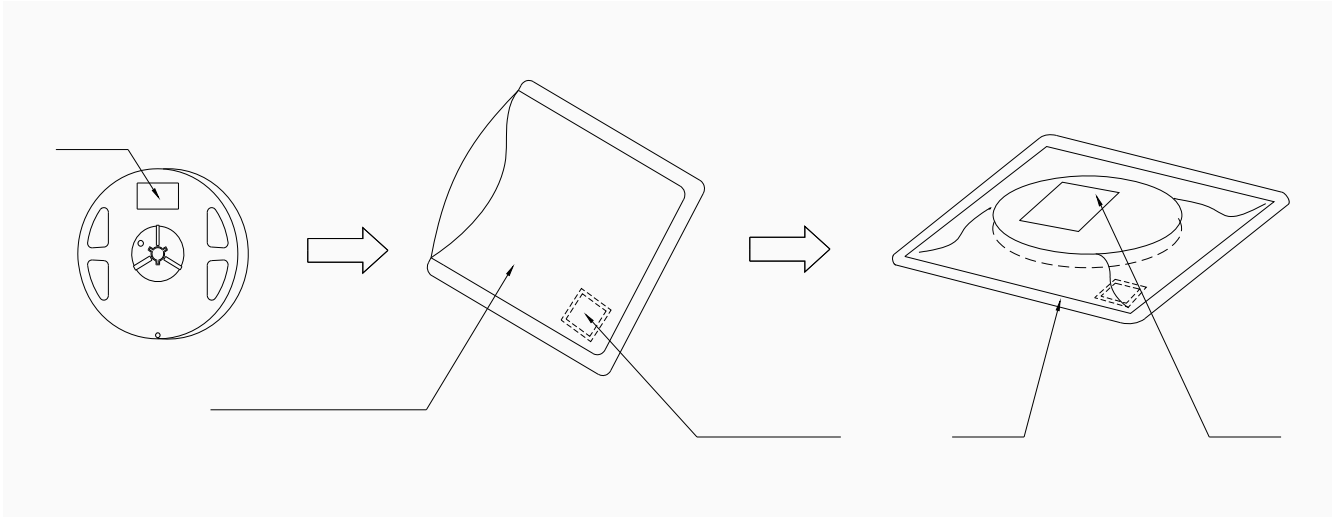

- ✧ Moisture Proof and Anti-Electrostatic Foil Bag

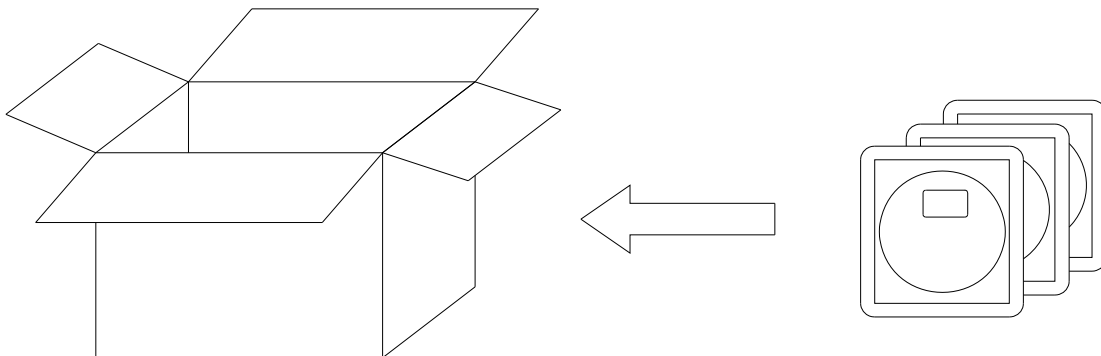

- ✧ Cardboard Box




- ✧ Label Explanation

| | | |
|-----------------------------|-------|--|
| LIGHT | |  |
| Light Electronics CO., LTD. | | |
| TYPE NO.: | _____ |  <small>LOT NO.:</small> |
| QUANTITY: | _____ | |
| BIN: | _____ | |
| DATE CODE: | _____ | |
| REMARKS: | _____ | |

| | |
|--|--|
| | |
| | |
| | |

LIGHT

LIGHT ELECTRONICS CO., LTD.

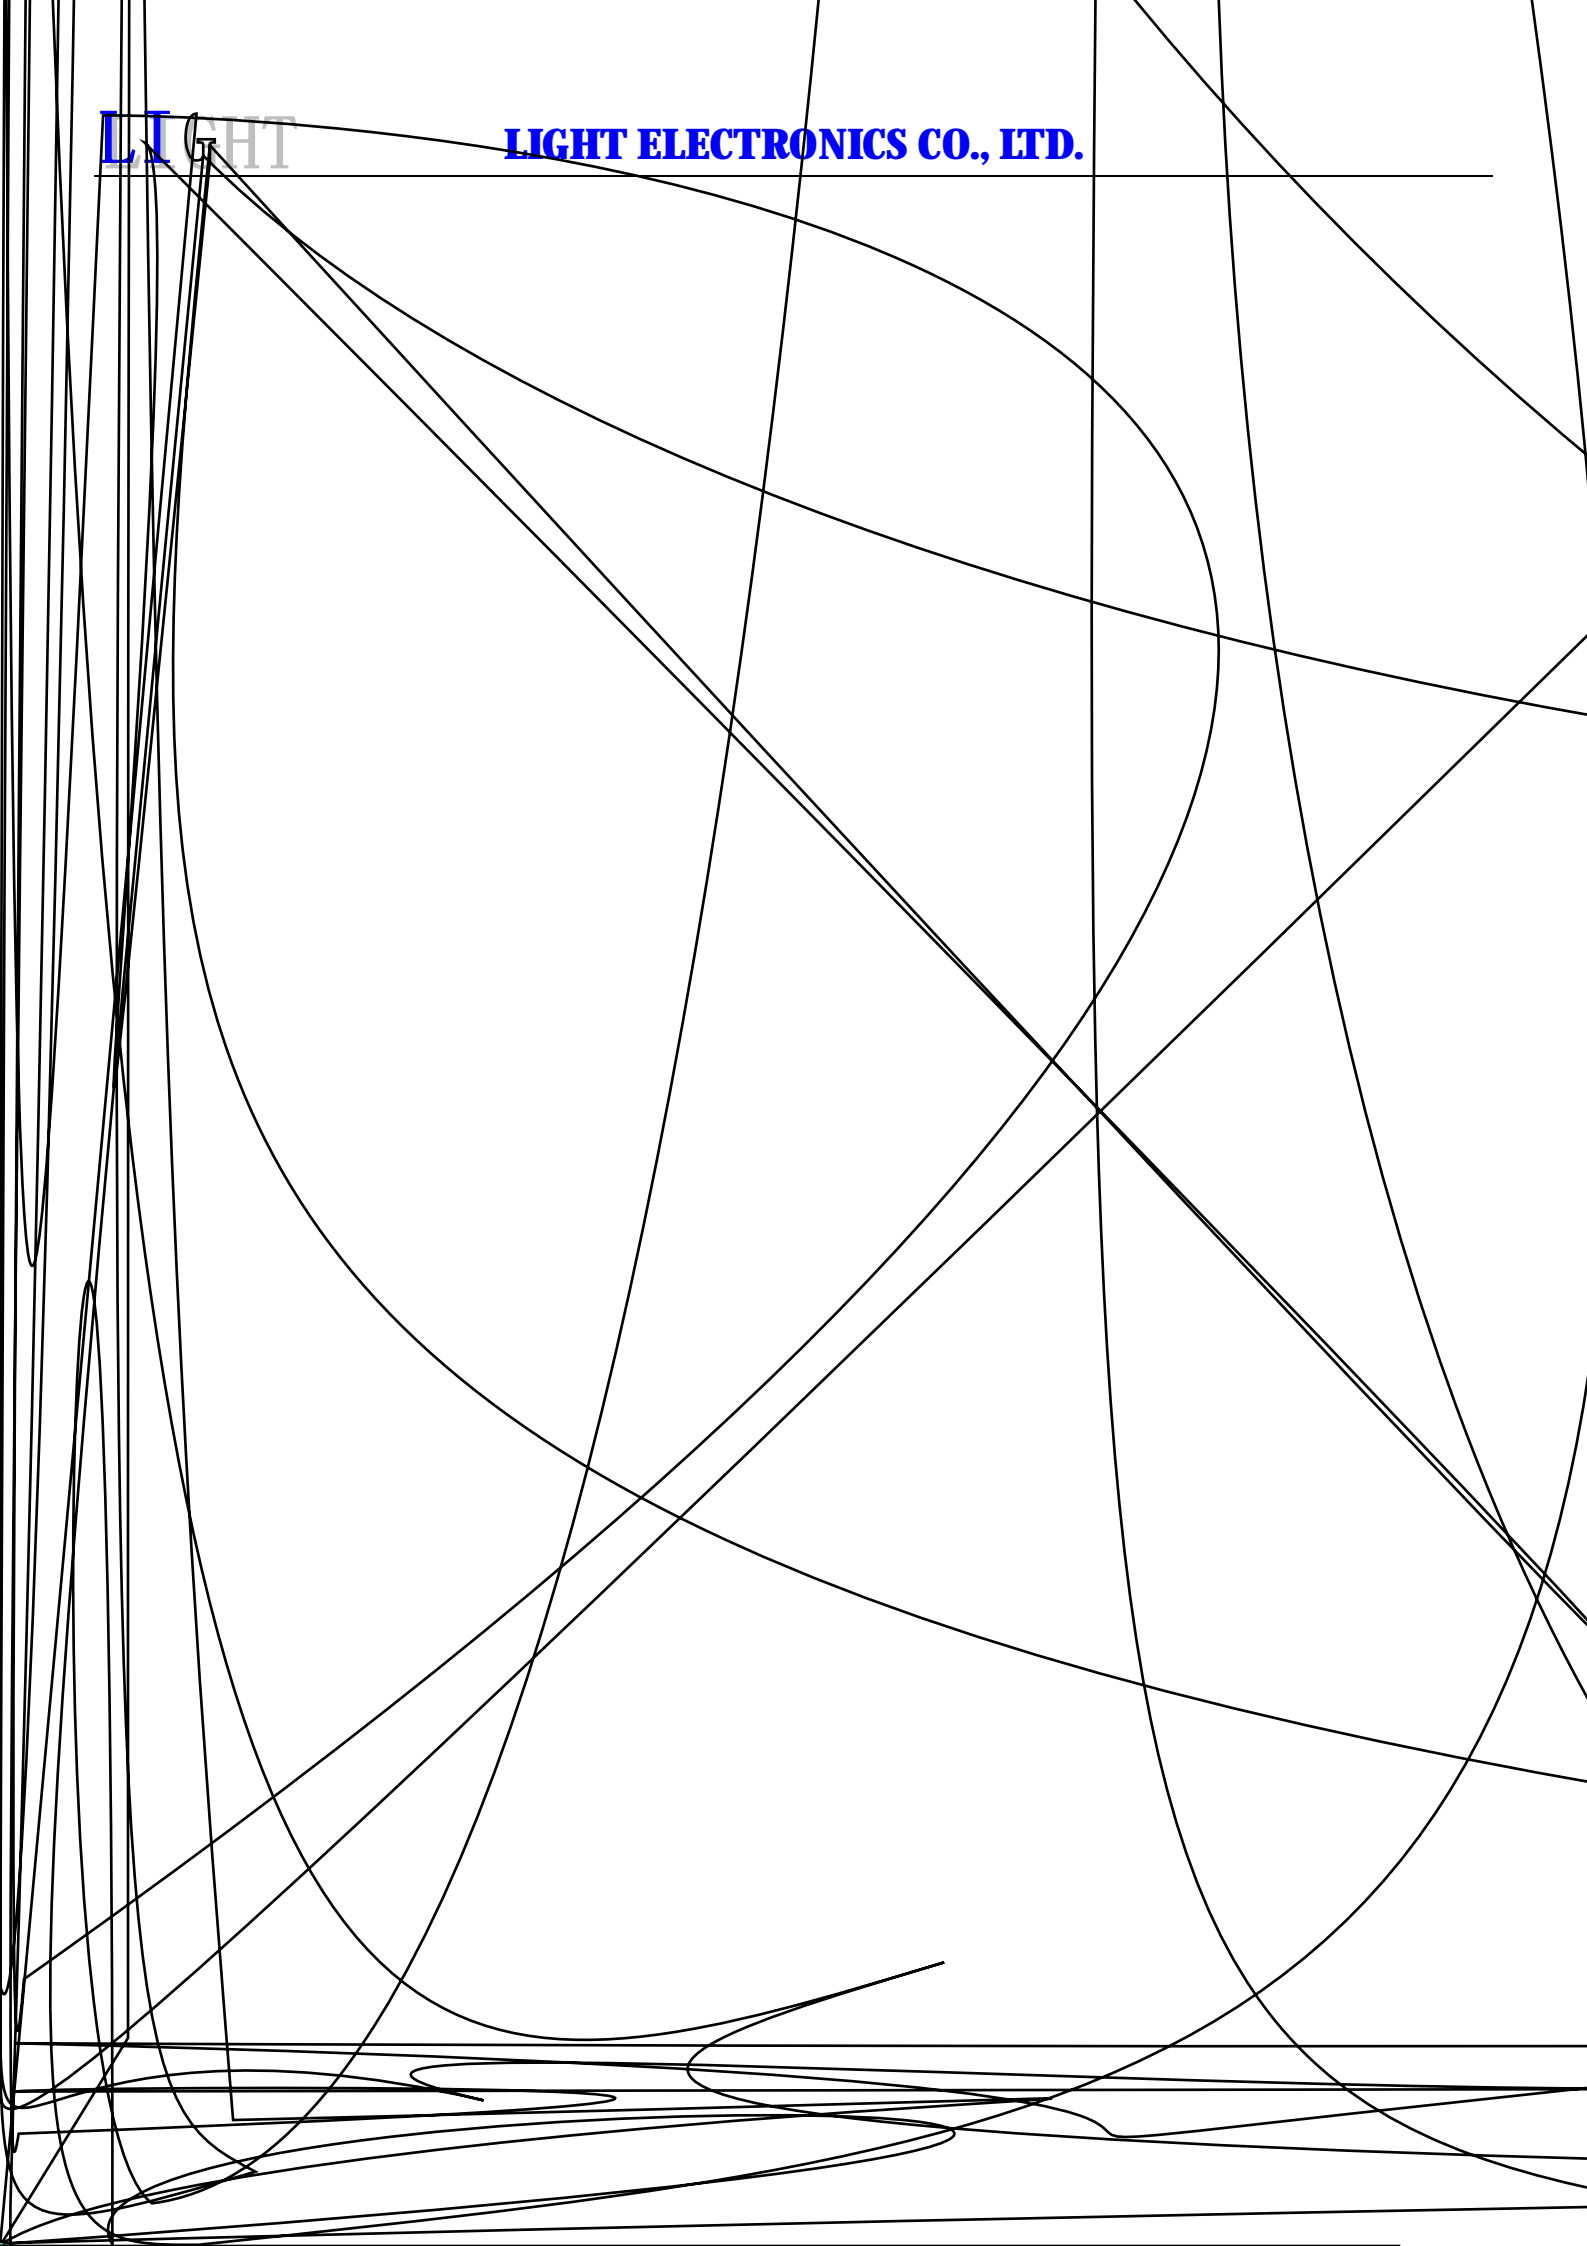

2

Guideline for Soldering (2)

- x .
- x .
- x .
- x .

9

(1)

Precautions (1)

1.

Storage

•

•

•

•

•

y

y

y

2.

Static Electricity

•

•

•

(2)



Precautions (2)

3.

Design Consideration

-

-

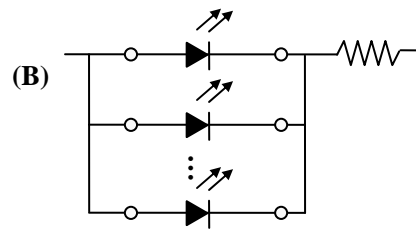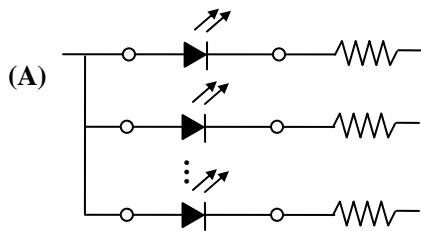

-

4.

Reverse voltage protection

-


5.

The safe temperature for LEDs working

-

6.

-

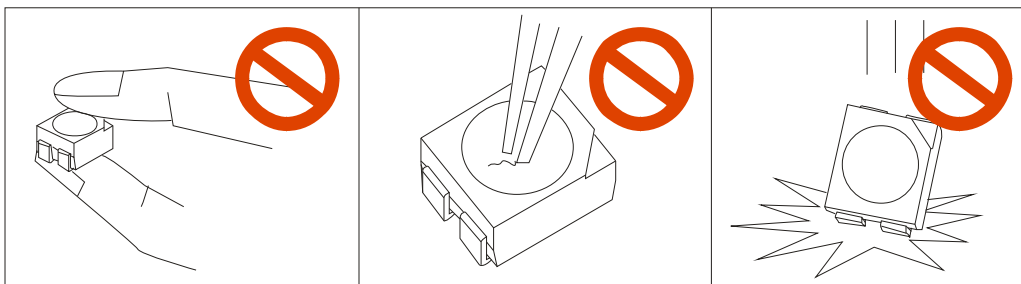

-