

LIGHT

LIGHT ELECTRONICS CO., LTD.

Electro-Optical Characteristics



参数名称		符号	数值	单位



Electro-Optical Characteristics (Temperature=25°C)


参数名称	符号	条件	颜色	最小值	典型值	最大值	单位
							μ
	λ						
	Δλ						
	θ						

以上 厂商

manufacturer.

1101

LIGHT ELECTRONICS CO., LTD.

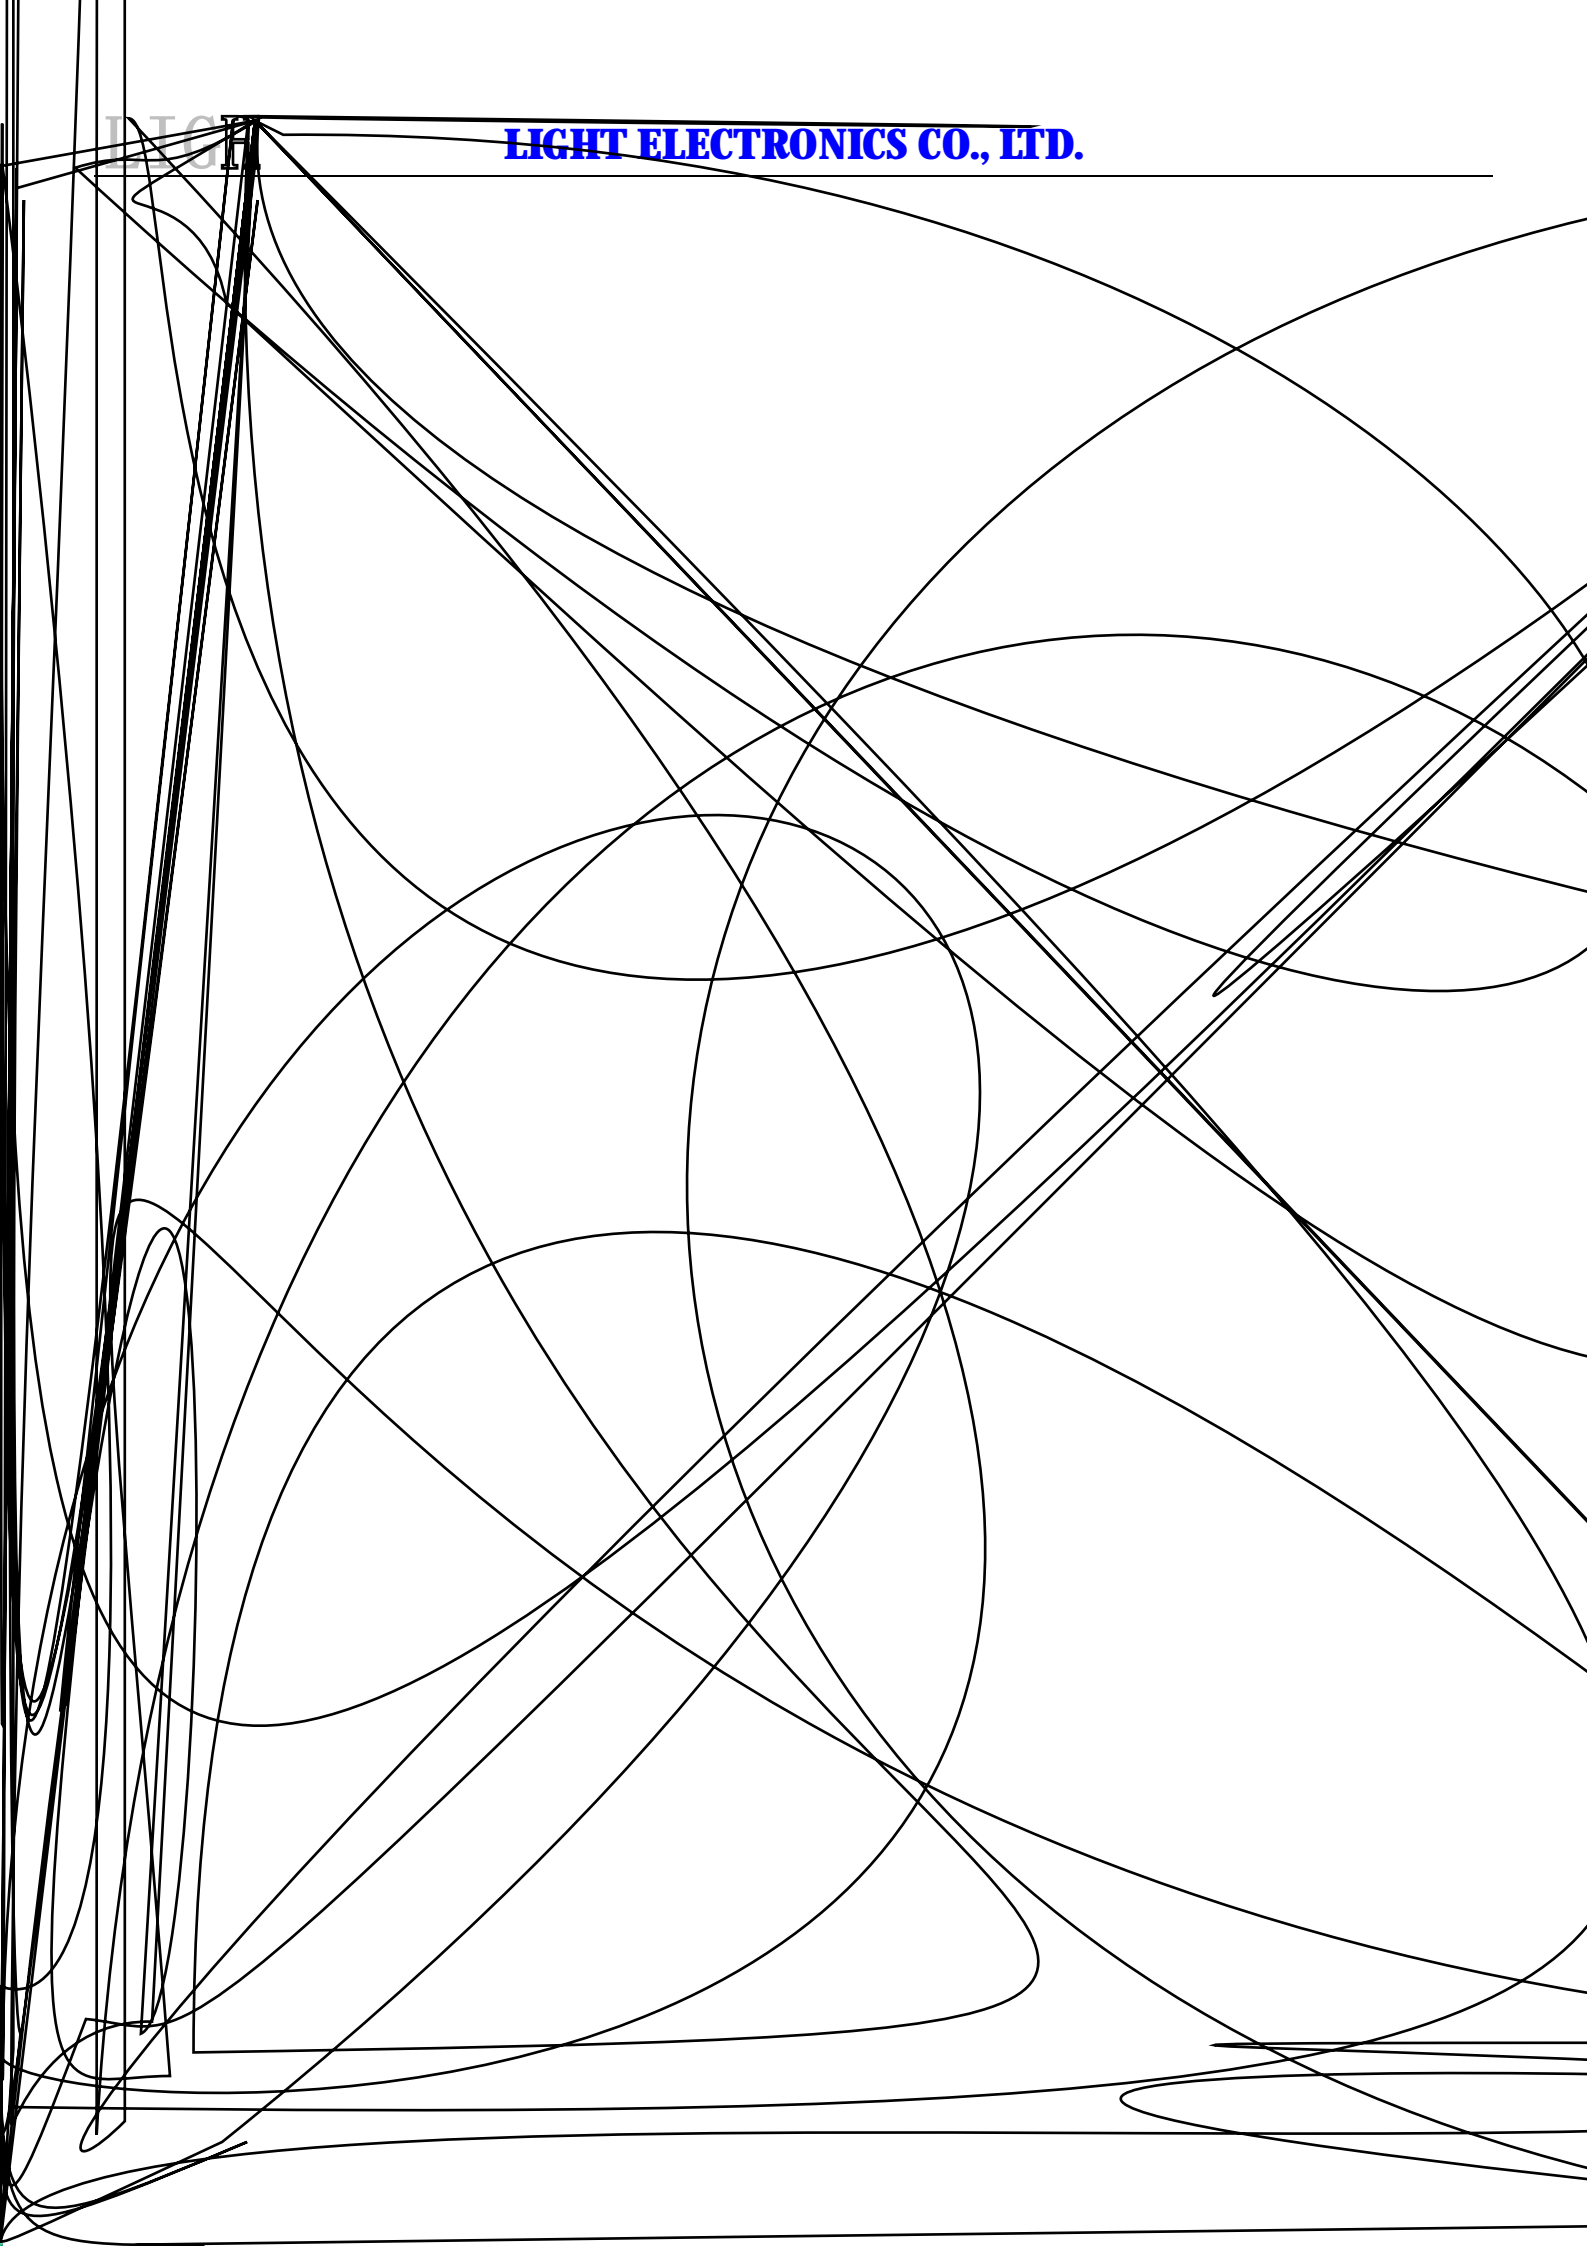


Reliability Test Items And Conditions

实验项目	参考标准	实验条件	时间	样品数	
		←→			

Product design and operational recommendation


1 mm

Product design Unit: mm




2 mm

Recommended soldering pad (Unit: mm)

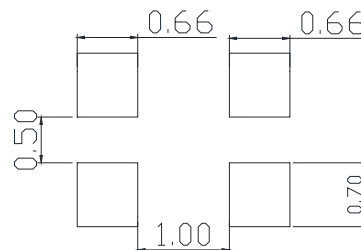

3 0.75mm

Recommendation for glue filling: filling height must be higher than or equal to 0.75mm

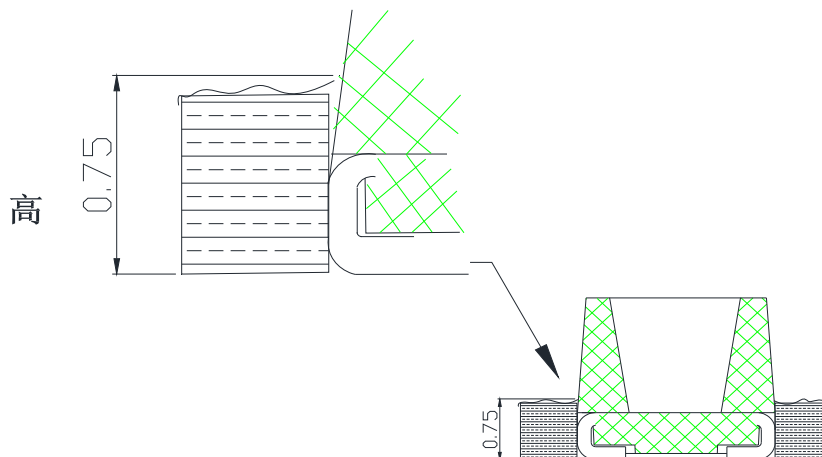

1

Packaging (1)

◇ Carrier Tape


◇

2


Packaging(2)



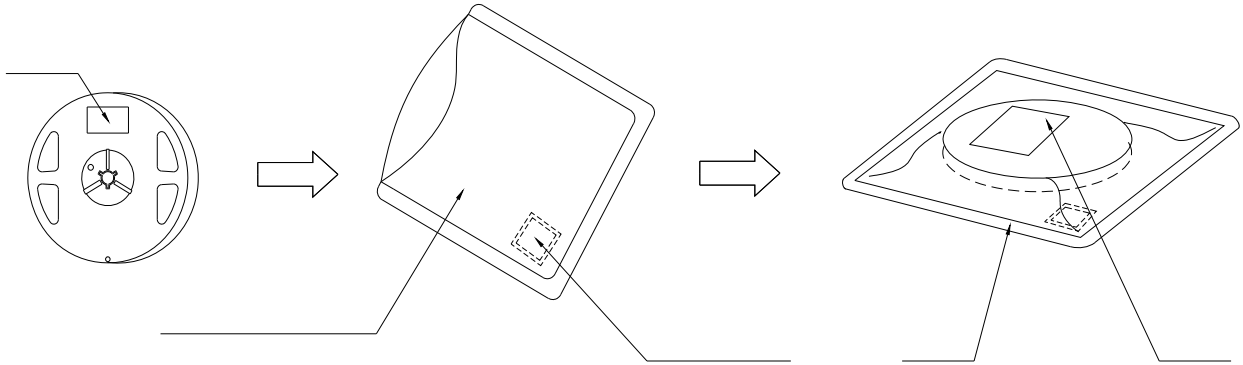

Moisture Proof and Anti- Electrostatic Foil Bag

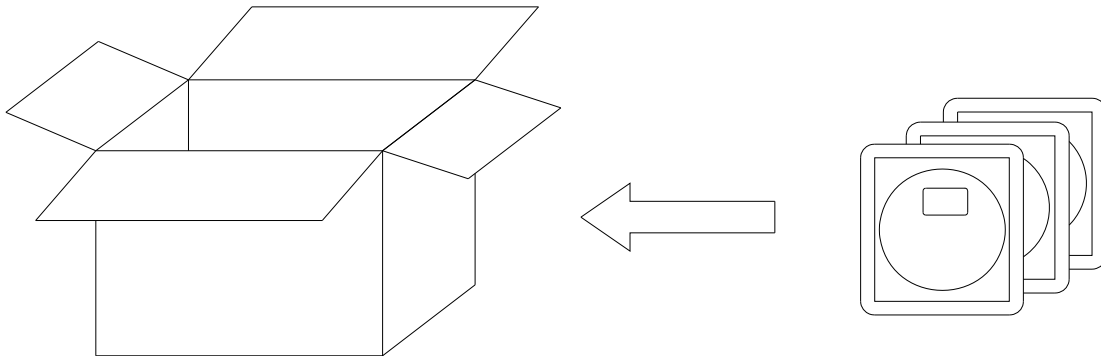

Cardboard Box




Label Explanation

LIGHT		
Light Electronics CO., LTD.		
TYPE NO.:	_____	 <small>LOT NO.:</small>
QUANTITY:	_____	
BIN:	_____	
DATE CODE:	_____	
REMARKS:	_____	

TYPE NO./	QUANTITY/
BIN./	DATE CODE/
REMARKS/	LOT NO./

LIGHT

LIGHT ELECTRONICS CO., LTD.

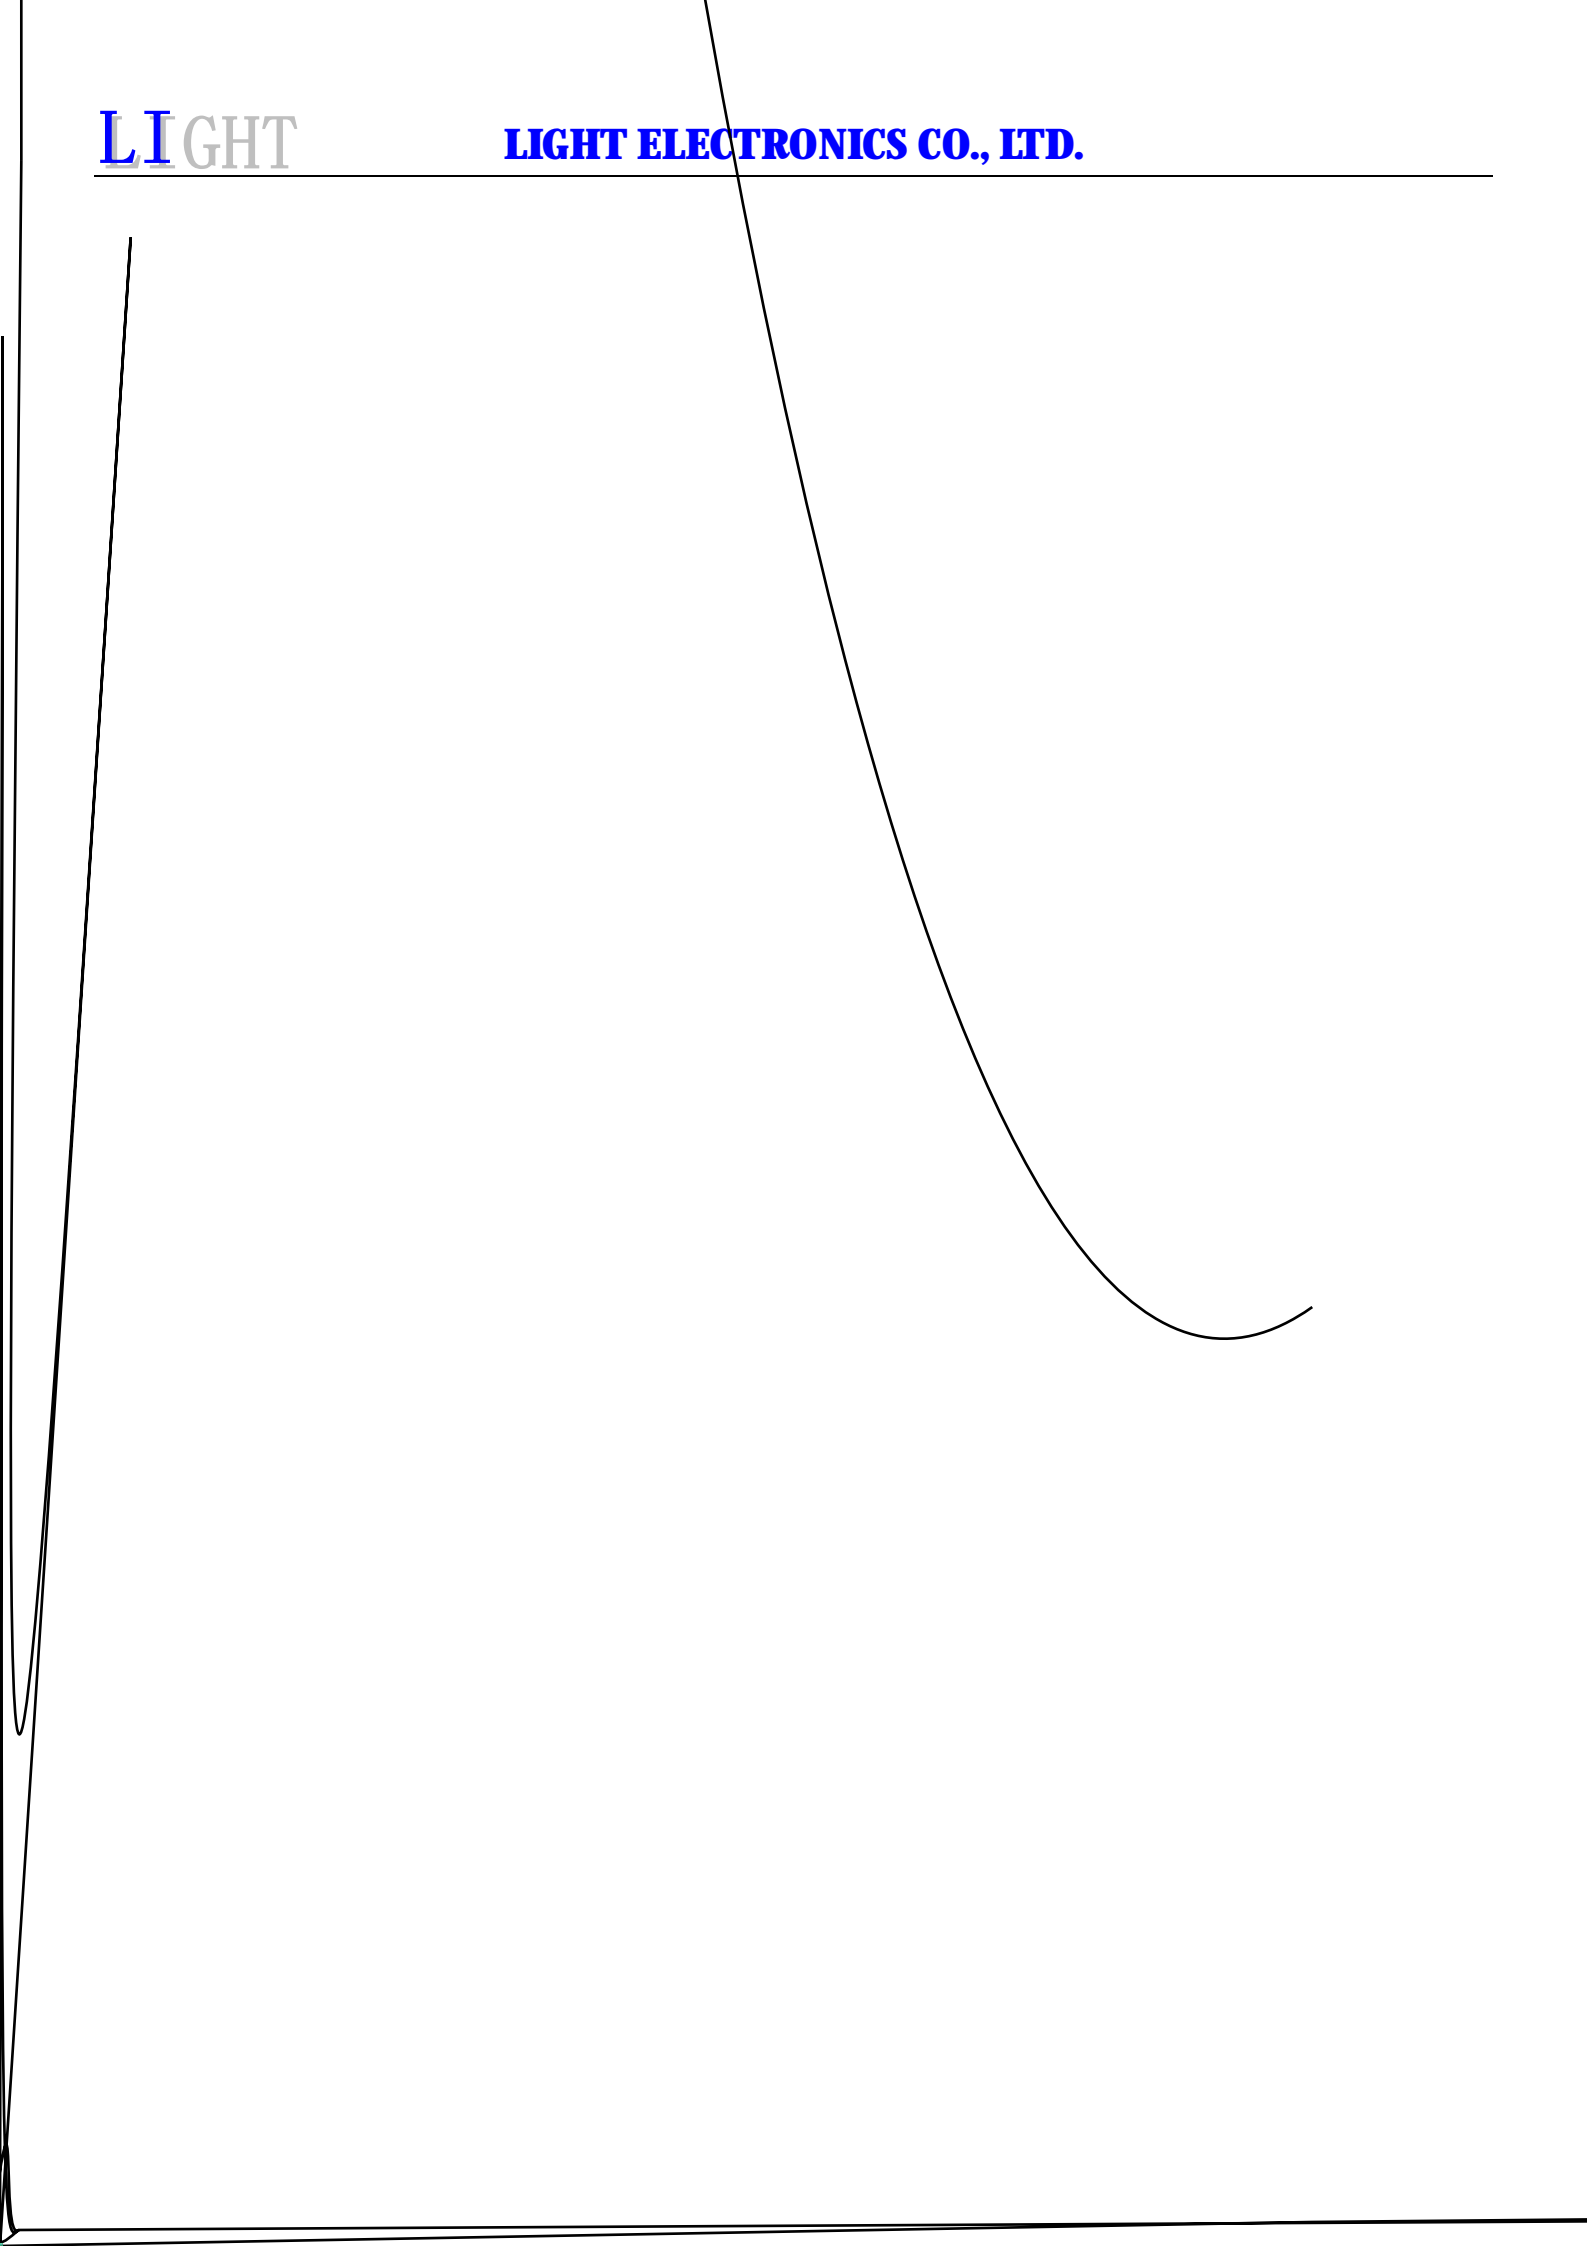



2

Guideline for Soldering (2)

(1)

Precautions (1)

1.

Storage

-
-
-
-
-

2.

Static Electricity

-
-
-

(2)



Precautions (2)

3.

Design Consideration

-

-

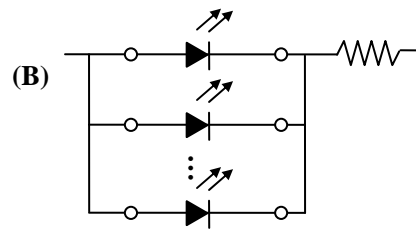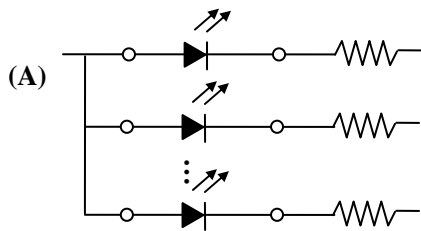

-

4.

Reverse voltage protection

-


5.

The safe temperature for LEDs working

-

6.

-

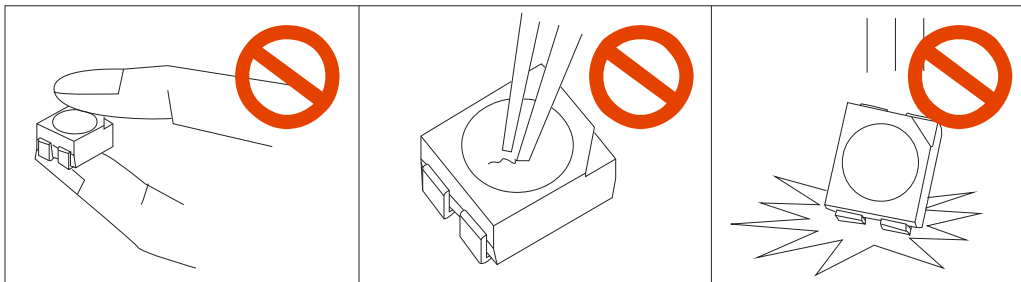

-